

Daffodil International University Faculty of Science & Information Technology Final Examination, Fall 2022

Course Code: CSE412 Course Title: Big Data and IoT Sections & Teachers: All Batch: 53, 54

Time: 2:00 Hrs

Marks: 40

Answer <u>ALL</u> Questions
[The figures in the right margin indicate the full marks and corresponding course outcomes. All portions of each question must be answered sequentially.]

1.	a)	Illustrate the life cycle of Big Data Analytics.	[5]	COI
2.	(a)	Analyze the MapReduce wordcount process to the following input: "The deepest night burning bright bright and night"	[5]	CO2
	b)	Let's say that, DIU administration requires 2500TB of space. But for performing this task they have a JBOD of 25 disks and each disk can store 9TB of data. In this case 1. Show the number of data nodes required to store 2500TB of data. 11. Interpret which communication protocol will be used for communicating with Name Node.	[5]	
3.	<i>a)</i>	A B	[5]	СОЗ
	b)	Compare the two systems A & B after identifying them. Suppose, you have created a youtube channel. Here you post different types of educational video for the user. But there are very few subscribers. As a result, when you post a video, no one gets notification without the subscriber. I. Determine which IoT communication model is presenting the above scenario. II. Justify your answer with proper explanation and architecture.	[5]	
4.	a)	Consider package monitoring in a distribution system. The movements that occur to the package are reviewed here. If they exceed the threshold, an alarm is triggered. To detect these movements, the IoT system has gyroscope and	[10]	CO4

	real-ti low o data f analysis not	erometer sensors. The controller service uses Websocket API to send time data to the cloud, which is useful in real-time applications due to its verhead. A cloud-based WebSocket-based service retrieves real-time from IoT devices and stores it in a database. It retrieves it as required for sis. The data is voluminous, i.e. large data, in this case. So data analysis possible locally, and control actions are activated using a mobile app or app based on the results of the analysis. Now answer the following ions. Choose the required IoT level for the above scenario. Justify Why you choose the IoT level (that you have mentioned in the Question I) Explain the architecture of your selected IoT level.		
<i>b)</i>	Expla	ain the different types of components used in IoT?	[5]	



Daffodil International University

Faculty of Science and Information Technology Department of CSE

Final Examination, Semester: Fall 2022

Course Title: Computer Architecture & Organization Course Code: CSE 411

Section: All

Full marks: 40 Time: 02:00H Answer All the Questions. Figure in the right-side margin indicate full marks

1.	a.	Multiply the given unsigned binary numbers 1101±1010		
		Multiply the given unsigned binary numbers 1101*1010 and demonstrate the AND array for this multiplier.	[4]	
	b.	Calculating exponentiation and trigonometric functions are harder to implement. Illustrate the technique which is used to solve this problem and show its working procedure in the pipeline processing where the input capacity is 4 words .	[4]	C02
2.	a.	Construct the Pipeline for a situation where instruction 4 is a conditional branch to instruction 10. Mention till when the branch cannot be determined and in which time unit no instructions are completed in the pipeline.	[4]	
	b.	Identify the Hazard which will occur in the given instruction with Hazard Diagram: I1: ADD R1, R2, R3 I2: SUB R4, R1, R2	[4]	CO3
	c.	Suppose you have 11 instructions to process with no-branch. Assume that the instruction cycle time without pipeline is 7 milliseconds. Now identify the total time required for a pipeline with 4 stages to execute all the instructions and find out the speedup factor.	[2]	
3.	a.	Discover the performance factors with the memory hierarchy. State the Cache Read Operation with flowchart.	[4]	
	b.	Assume you have a Main Memory which is size of 128 Byte and a Cache Memory size of 16 Byte. Each line of cache memory can hold a block of 32 bits at a time and each block contain 4 data. Now sketch the Associative Mapping from Cache to Main Memory with example of Address Structure. Also mention two advantages and disadvantages of Set-Associative Mapping.	[8]	C04
4.	a.	Discover the necessity of virtual memory and prepare the Address Translation technique of virtual memory with proper figures.	[4]	
	b.	Construct transfer of a Paged Memory to Contiguous Disk Space (Swap in/out) with figure.	[4]	C04
	c.	Analyze the sharing process of virtual memory with proper diagrams.	[2]	



Daffodil International University Department of Computer Science and Engineering Faculty of Science & Information Technology

Midterm Examination, Fall 2022

Course Code: CSE 412, Course Title: Big Data and IoT

Level: 4 Term: 1, 2 Batch: 54, 53

Time: 01:30 Hrs

Marks: 25

Answer ALL Questions [Optional]

[The figures in the right margin indicate the full marks and corresponding course outcomes. All portions of each question must be answered sequentially.]

1.	(a)	Illustrate the major components of a Pig execution environment?	[4]	COI
	b)	Compare between Apache Sqoop and Flume.	[4]	
	c)	Explain how Apache Pig is different from MapReduce?	[4]	
2.	a)	Assume, you want to store a file "BIG.txt" in Hadoop cluster. The size of that file is 2GB. Now, answer the following questions: 1. How many input splits would HDFS create? 2. What would be the size of each input split? 3. What will be the minimum and maximum number of blocks Hadoop can create?	[5]	CO2
	b)	Classify core components of Hadoop and the various Hadoop daemons with their roles in a Hadoop cluster.	[4]	
	c)	Inspect how YARN allocates resources to an application with the help of its architecture.	[4]	



Daffodil International University Department of Computer Science and Engineering Faculty of Science & Information Technology

Final Examination, Fall 2022

Course Code: CSE421, Course Title: Computer Graphics

Level: 4 Term: 1, 2 Batch: 53, 54


Time: 02:00 Hours


Marks: 40

Answer ALL Questions

[The figures in the right margin indicate the full marks and corresponding course outcomes. All portions of each question must be answered sequentially.]

1.	a) Explain visual defects occur in Figure-A. How can you remove this jagged image in the context of Computer Graphics?	[5]	CO1
	Jugged image in the context of Computer Grapmes.		
	Figure- A		
	by Rubel wants to be a graphics designer. Recently, He opened a profile in an online platform freelancer.com. One of the clients requests him to design a logo for his new company. Now, Rubel worries about the uses of different colors. Can you interpret Rubel to select which color model is appropriate for electronic display and why?	[5]	
2.	a) Analyze the following figure-B, the right-side pentagon is the original object whereas the left one is the output after applying two dimensional transformations on it. Now, discover which transformations have been applied on it and properties of those transformations. Figure-B		CO2

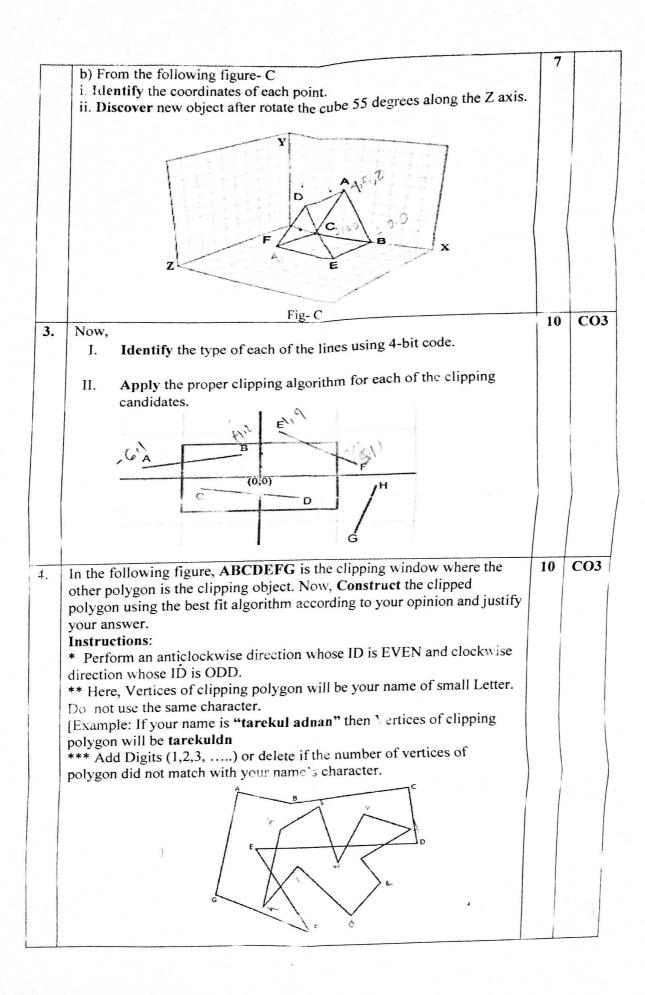

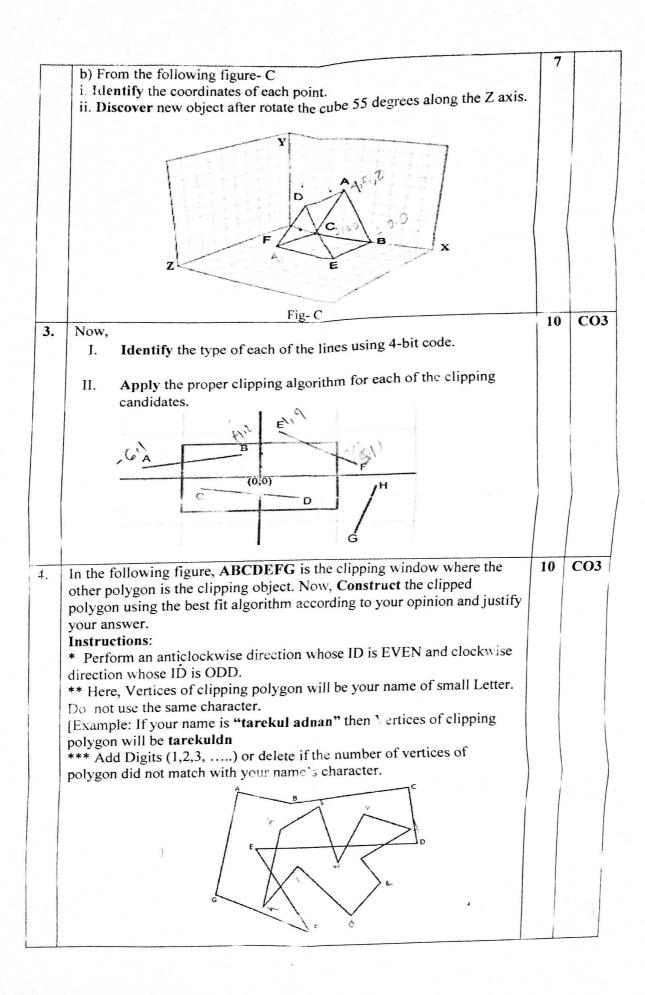



Daffodil International University Faculty of Science & Information Technology Final Examination, Fall 2022

Course Code: CSE331 Course Title: Compiler Design Sections & Teachers: L3T2 L4T1 Batch-56 Batch-54

Marks: 40 Time: 2:00 Hrs

Answer ALL Questions [Optional]

[The figures in the right margin indicate the full marks and corresponding course outcomes. All portions of each question must be answered sequentially.]

1.	a,	Produce LR (0) automation and Canonical table for the following grammar.	[6]	
		$A \rightarrow A*BA \mid xC#y$		
		$B \rightarrow z, BC \mid CuA$		
		$C \rightarrow BvA \mid *zD$		
		$D \rightarrow xy$,		CO2
	(b)	Apply Left Factoring on the following:	[4]	
		E -> education educational educationist edu.bd edu A		
		$A \rightarrow a \mid b \mid \varepsilon$		
	(a)	If you find a Left recursion problem, Explain why? And convert it into the right	[4]	
		form.		
		$EDU \rightarrow BRN$		
		BRN → a KNG a MEM a UND BRN c		
		$KNG \rightarrow b KNG MEM \mid f$		CO
		$MEM \rightarrow g \mid \epsilon$		
		$UND \rightarrow d \mid \epsilon$	162	
	b)	Construct LL(1) Parsing Table from the given grammar in 2 (a)	[6]	
	<i>a</i>)	Consider the following expression:	[6]	
		$z = (b^c/d) + (b^c*t/f) * b - (b+b+b)^c(c-d)$		
		i. Write the three address code for the expression.		
		ii. Write the quadruple for the expression		CO
Name of Contrast o		iii. Write the triple for the expression.		1
and disperse	bı	Draw the Directed Acyclic Graph (DAG) for the 3(a).	[4]	1

a)	Write short notes on the following t	topics	[4]
	i. YACC		
	ii. Dead Code Elimination		
	iii. Copy Propagation		
b)	Consider the following three addres	is codes and answer the questions.	[6]
	1. 1=a*n	0 1 1 4 * :	1
	2. n	25. $x=a[t11]$	
	3. $t1=4/n$	26. t12=4*i	
	4. goto(2)	27. goto(2)	
- 1	5. t4=4*j	28. t12=4*i	
	2. n 3. t1=4/n 4. goto(2) 5. t4=4*j 6. t5=a[14]	29. t17=4*i	7
	7. $t2=4*i$	30. goto (24)	100
	8. $t3=a[t2]$	31.t19=a[t18]	18
	9. if t3 <v (7)<="" goto="" td=""><td>27. goto(2) 28. t12=4*i 29. t17=4*i 30. goto (24) 31.t19=a[t18] 32. a[t17]=t19 33. t20=4*j 34.t11=4*n goto (33)</td><td>A_b</td></v>	27. goto(2) 28. t12=4*i 29. t17=4*i 30. goto (24) 31.t19=a[t18] 32. a[t17]=t19 33. t20=4*j 34.t11=4*n goto (33)	A _b
	10. goto (13)	33. t20=4*j	17
- 1	11. $v=a[t1]$	34.t11=4*n goto (33)	
	12. $i=i+1$	35. goto(12)	
	13. if t5>v goto(9)	36. if t3 <v (2)<="" goto="" td=""><td></td></v>	
	14. if $i \ge j goto(26)$	37. goto (24)	
- 1	15. t6=4*i	38. $v=a[t21]$	
- 1	16. $x=a[t6]$	39. i=i+1	
	17. $t7=4*i$	40. t22=4*i	O.
	18. if $j=1$; goto (27)	41. t23=a[t2]	
	19. $t9=a[18]$	42. if 5>v goto (9)	the state of
	20. $a[t7] = t9$	42. if t5>v goto (9) 43. if i>=j goto (39) 44. j=a*m 45. goto (24)	AS
	21. t10=4*j; goto (24)	44. j=a*m	000
	22. $a[t10]=x$	8-1-(-1)	10
	23. goto(2)	46. goto (15)	
j	i. Which lines of the above code are	e leader instructions by the leader selection	
	rule 2? (Write down the numbers		
i	ii. Which lines of the above code are	e leader instructions by the leader selection	
	rule 3? (Write down the numbers	only)	
i	ii. How many basic blocks are presen		
i	v. Is there any instruction lines whic	h are selected as leader more than 3 times?	



Daffodil International University Faculty of Science & Information Technology Final Examination, Fall 2022

Course Code: CSE414: Course Title: Web Engineering Sections & Teachers: All

Time: 2:00 Hrs

Marks: 40

Answer ALL Questions

[The figures in the right margin indicate the full marks and corresponding course outcomes. All portions of each question must be answered sequentially.]

1.	. (a)	Utilize the PHP code that would be saved in the database to process the order form. The user can order two categories products at a time. You should display the ordered products list. Your code should also compute the total cost of the order and shipping cost added to the order. The user can search from the webpages to the order. If the order is done, also print a "Thank you for your order!" message at the bottom of your output. (Note: Don't forget to design a user-friendly form for this particular scenario).	15	CO4
	b)	Utilize the JavaScript code to add behavior to the following page that has a user interface for a basic vocabulary quiz. The quiz data comes from user. When the user clicks a button to guess the definition, display an alert message of either "You are correct" or "You are incorrect", and then once the alert box is closed, start a new quiz by fetching a new word and displaying it to the user. The relevant HTML design page is the following: User Input: Display: Click	15	
2.	(a)	What are the three components of MVC? How do MVC Frameworks work? Explain with an example.	05	CO1
	b)	What is Project Management process and what is the most crucial factor in Project Management?	05	

Best Wishes!